



BLANKFORT™
VERSATILE FIRE-RESISTANT DOOR BLANK

Blankfort™ 30

Blankfort™ 30 is a high density particleboard faced timber cored door blank specifically designed for wood veneering and plastic laminating and further producing at minimum cost to provide a high quality 30-minute fire resisting interior door.

Technical Details



- ① **Top Rail:** made of (105mm) selected and finger jointed softwood continuously glued with type 1 PVA adhesive (*only required for dimension over 2135mm*)
- ② **Core:** (27mm) of selected and finger jointed softwood continuously glued with type 1 PVA adhesive
- ③ **Faces:** (9mm) of high density particleboard (chipboard), bonded to core with type 1 PVA adhesive

Standard in the following sizes

Other sizes available to special order

Width	Height	Thickness
840mm x	2060mm x	45mm
920mm x	2135mm x	45mm
920mm x	2440mm x	45mm
920mm x	2750mm x	45mm
1220mm x	2440mm x	45mm

Chipboard

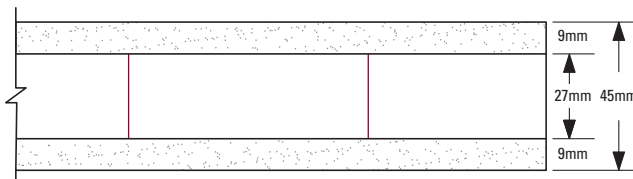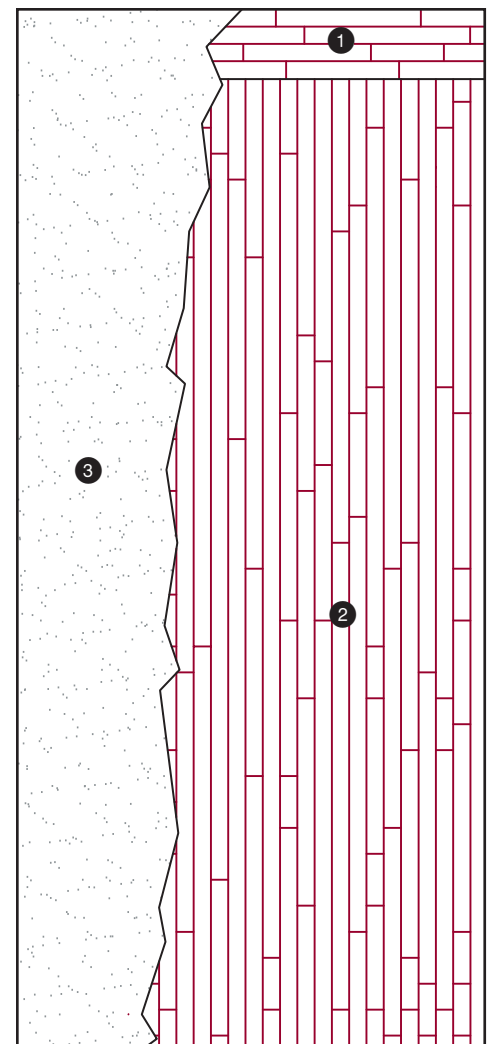

For Fire Resistance Test Data, please refer to **Blankfort™ 30** technical data sheet