



Blankfort™ 60+

Blankfort™ 60+ is a high density particleboard sub face MDF or HDF faced timber cored door blank specifically designed for wood veneering and plastic laminating and further producing at minimum cost to provide a high quality 60-minute fire resisting interior door.



Technical Details

- 1 **Top Rail:** made of (105mm) selected and finger jointed softwood continuously glued with type 1 PVA adhesive
- 2 **Core:** (30mm) of selected and finger jointed softwood continuously glued with type 1 PVA adhesive
- 3 **Sub face:** (9mm) of high density particleboard (Chipboard) sanded if requires, bonded to core with type 1 PVA adhesive
- 4 **Faces:** (3mm) of medium density fibreboard (MDF) sanded if required, bonded to core with type 1 PVA adhesive
Option: (3mm) of high density fibreboard (HDF) and (3mm) of plywood

Standard in the following sizes
Other sizes available to special order

Width	Height	Thickness
840mm x	2060mm x	54mm
920mm x	2135mm x	54mm
920mm x	2440mm x	54mm
920mm x	2750mm x	54mm
1220mm x	2440mm x	54mm
920mm x	3050mm x	54mm

Chipboard & MDF

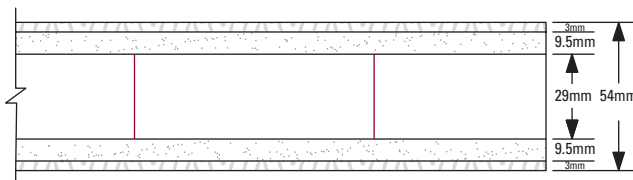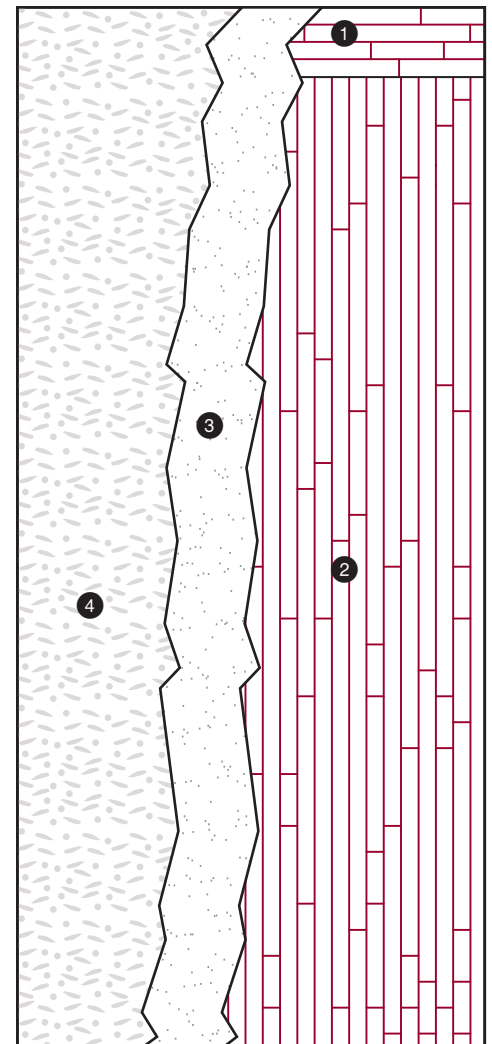

For Fire Resistance Test Data, please refer to **Blankfort™ 60+** technical data sheet

REV. 04/2012