



BLANKFORT™
VERSATILE FIRE-RESISTANT DOOR BLANK

Blankfort™ 60

Blankfort™ 60 is a high density particleboard faced timber cored door blank specifically designed for wood veneering and plastic laminating and further producing at minimum cost to provide a high quality 60-minute fire resisting interior door.



Technical Details

- ❶ **Top Rail:** made of (105mm) selected and finger jointed softwood continuously glued with type 1 PVA adhesive (*only required for dimension over 2135mm*)
- ❷ **Core:** (36mm) of selected and finger jointed softwood continuously glued with type 1 PVA adhesive
- ❸ **Faces:** (9mm) of high density particleboard (Chipboard), bonded to core with type 1 PVA adhesive

Standard in the following sizes
Other sizes available to special order

Width	Height	Thickness
840mm x	2060mm x	54mm
920mm x	2135mm x	54mm
920mm x	2440mm x	54mm
920mm x	2750mm x	54mm
1220mm x	2440mm x	54mm

Chipboard

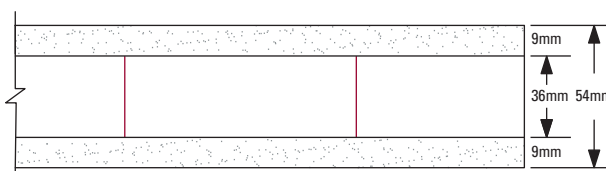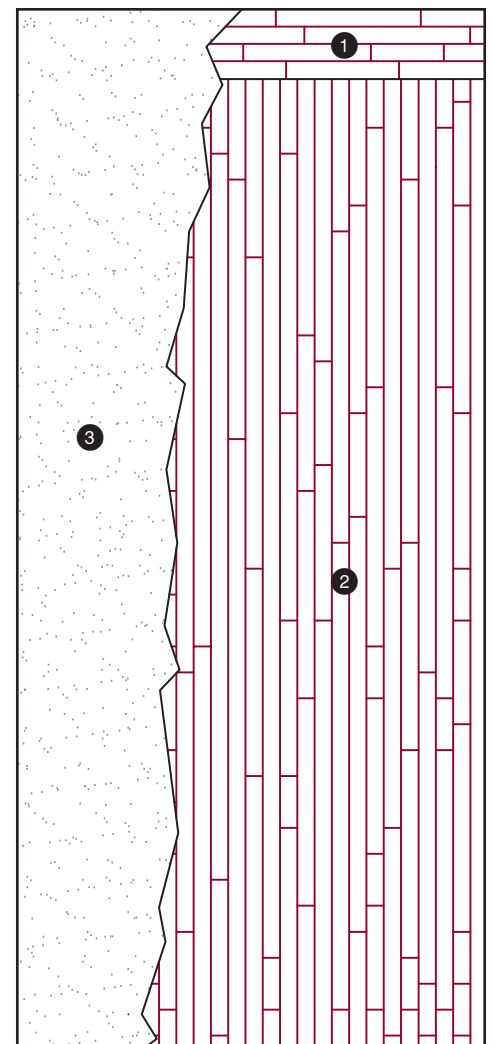

For Fire Resistance Test Data, please refer to **Blankfort™ 60** technical data sheet