




**BLANKFORT™**  
VERSATILE FIRE-RESISTANT DOOR BLANK

## Blankfort™ 60

Blankfort™ 60 is a high density particleboard faced timber cored door blank specifically designed for wood veneering and plastic laminating and further producing at minimum cost to provide a high quality 60-minute fire resisting interior door.


### Technical Details

- ① **Top Rail:** made of (105mm) selected and finger jointed softwood continuously glued with type 1 PVA adhesive
- ② **Core:** (27mm) of selected and finger jointed softwood continuously glued with type 1 PVA adhesive
- ③ **Faces:** (9mm) of high density fibreboard (HDF), bonded to core with type 1 PVA adhesive

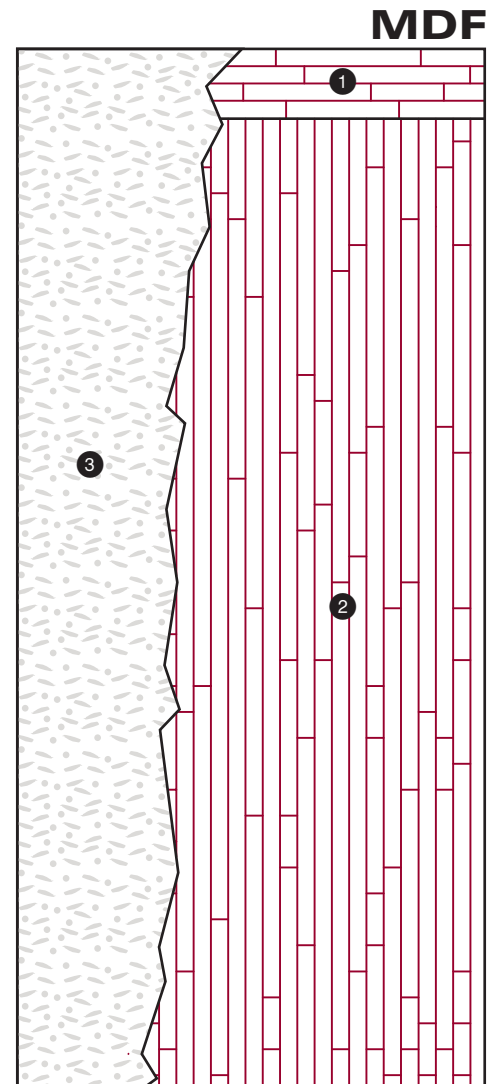

**Standard in the following size**  
Other sizes available to special order

Width	Height	Thickness
920mm	x 2135mm	x 54mm

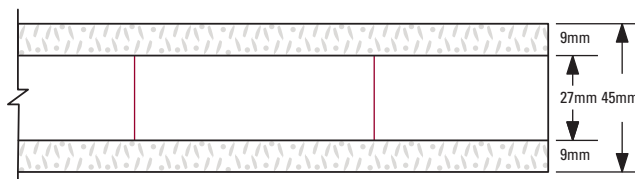

For Fire Resistance Test Data, please refer to **Blankfort™ 60** technical data sheet